

Data sheet


Climatic Chamber KK 115 Smart PRO



The photo above is for reference only, may show additional options not included in standard equipment. The real appearance, particularly color and structure of the material may differ from the ones presented in the photo.

Advantages of the SMART PRO controller:

- large (7"), clear, full colour touch screen
- LAN, USB ports and WiFi for communication and data transfer
- multi-segment time and temperature programs
- overview of data in tabular and graphic form
- visual and sound alarm
- Admin function for management
- password protected log-in
- internal memory for programs and data storage
- event registry with user notifications
- LabDesk software and user manual for direct download

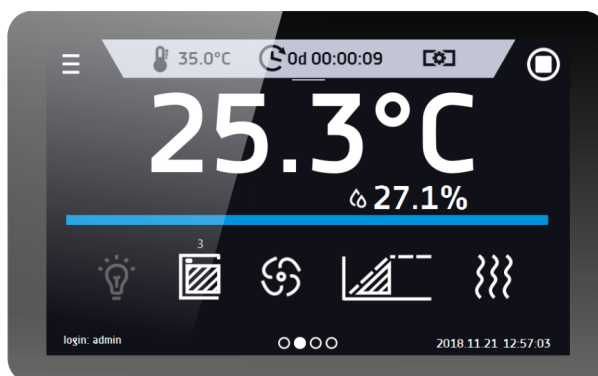


Smart PRO - preview screen

TECHNICAL DATA

air convection	forced
chamber capacity [l]	109
working capacity [l]	109
controller	microprocessor PID
display	7" full colour touch screen

TEMPERATURE AND HUMIDITY

temperature range [°C]	0...+60
temperature resolution every ... [°C]	0,1
temperature fluctuation at 25°C and 60%rH [±/°C]*	2,0
relative humidity range [%]	30...90 (see chart for details)
humidity resolution every ... [%]	1,0
humidity fluctuation at 25°C and 60% rH [%rH]	5,0
over temperature protection	class 3.3 to DIN 12880

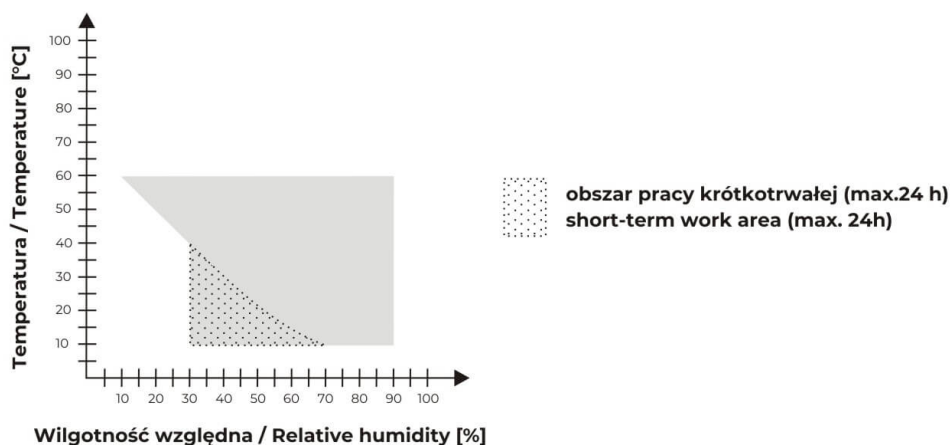

CHAMBER


door	double (external solid, internal glass) / external glass (option)
interior	
Smart PRO	acid-proof stainless steel to DIN 1.4301
IG Smart PRO	acid-proof stainless steel to DIN 1.4301
housing	
Smart PRO	powder coated sheet
IG Smart PRO	stainless steel linen finish

overall dims [mm] /1/

A width	670
B height	1340
depth C	950

internal dims [mm]

width D	460
height E	530
depth F	440

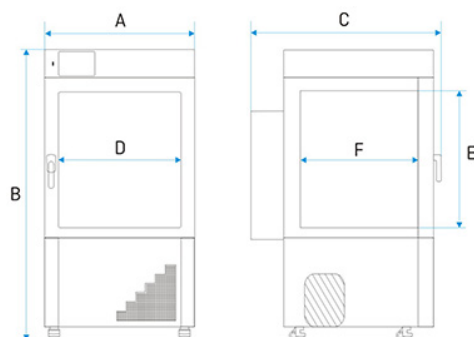

shelves (standard max)	2 7
max shelf workload [kg] /2/	10
- reinforced shelf version (PW) [kg] /3/	50
max unit workload [kg]	60
weight [kg]	90

ELECTRICAL PARAMETERS

power supply	230V 50-60Hz
nominal power [W]	1350
refrigerant	R1234ze / GWP=1
warranty	24 months
manufacturer	POL-EKO-APARATURA

all the above technical data refer to standard units (without optional accessories)

* - fluctuation measured in centre of the chamber; in space, variation (K) calculated for chamber as:

K= +/- (T average max. - T average min.) / 2

** - other power supplies on request


1 - depth doesn't include 50 mm of power cable

2 - on uniformly loaded surface

3 - reinforced shelf

4 - reinforced version

OPTIONS AND ACCESSORIES




Order number: */A

Door with viewing window




Order number: */P INOX

Stainless steel wire shelf INOX




Order number: */PP

Perforated shelf



Order number: */PW

Reinforced shelf




Order number: KUW GN*/*

Stainless steel cuvettes




Order number: */FIT

Phytotron system




Order number: GNZ

Internal socket



Order number: KK/CP

Low water level sensor



Order number: BRT*/L or IQ/OQ/PQ

Calibration and IQ, OQ, PQ qualification



Order number: BPP 12

Battery backup for display




Order number: PORT ALARM

Dry alarm contact



Order number: USBK

USB cable




Order number: LANK

LAN cable



Order number: OCZ/20

Non-standard access port 20 mm




Order number: OCZ/30

Additional access port 30 mm



Order number: OCZ/60

Non-standard access port 60 mm



Order number: OCZ/100

Non-standard access port 100 mm



Order number: KK/Z

Container for deionised water




Order number: KD

Access control



Order number: CCTV

Camera inside the chamber



Order number: CCTV CAM

Additional camera